

C25F Series (1.85 Male-ST to 1.85 Male-ST)

Low Loss .047 Cable Assembly, 50ohms, DC-67GHz



C25F-0P-0P-"L" (L: Length)

Maximum Ratings

Operating Temperature -55°C to +125°C


Storage Temperature -55°C to +125°C

Permanent damage may occur if any of these limits are exceeded


Cable Diameter	1.42mm	
Velocity of Propagation	70%	
Shielding Effectiveness	>100dB	
Power Handling at 20°C	6 GHz	19W
	18 GHz	11W
	26.5 GHz	8W
	40 GHz	7W
	40 GHz	6W
	40 GHz	5W
Min. Bending Radius	3mm	

Outline Drawing

Unit[mm]



Cable Cross Section

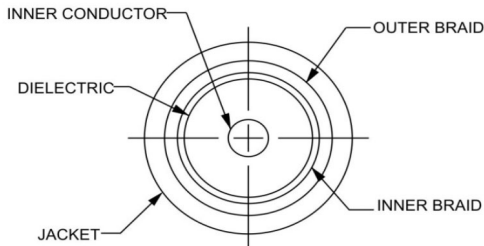

Cable Construction	
Inner Conductor	SPC, Solid
Dielectric	Foamed PTFE
Inner Braid	Silver-Plated Copper Strip
Outer Braid	Silver-Plated Copper Braid
Jacket	FEP

Connectors	
● Nut, Stainless steel, Passivated	
● Body, Stainless steel, Passivated	
● Center contacts, Berillium Copper, Gold plated	
● Dielectric, PTFE, Natural	

Product Guarantee*

Micable will repair or replace your cable assembly if it fails within six months after shipment. This guarantee excludes product damage from misuse or abuse

Features

- Super flexible with minimum bend radius of 3 mm
- Cable loss <10.3dB/m @ 67GHz
- VSWR <1.35:1 @ 67GHz
- Shielding effectiveness >100 dB
- Phase stability vs temperature 400ppm@-40~+70°C
- Very stable performance during bending and shaking
 - Amplitude Stability: <±0.1dB@67GHz
 - Phase Stability vs. Flexure: ±6°@67GHz
 - (When wrapped 360° around a 14.2mm radius mandrel)

Applications

- In-box and board to board connection
- High-density integrated connection
- High accuracy miniature delay line
- 5G Massive MIMO and antenna OTA test
- Military and commercial miniature systems

Electrical Specifications at 25°C

Freq. (GHz)	Length (m)	Insertion Loss (dB@GHz)								VSWR (@GHz)							
		DC-26.5		26.5-40		40-50		50-67		DC-26.5		26.5-40		40-50		50-67	
		Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.
DC-67	0.2	1.5	1.7	1.8	2.1	2.1	2.4	2.5	2.9	1.24	1.30	1.26	1.30	1.29	1.35	1.31	1.35
	0.3	2.1	2.3	2.5	2.8	3.0	3.3	3.5	3.9								
	0.5	3.4	3.6	4.1	4.4	4.7	5.0	5.6	6.0								

Typical Performance Data (C25F-0P-0P-0.2M)

Frequency(MHz)	VSWR	Insertion Loss (dB)
50	1.02	0.08
1000	1.05	0.22
2000	1.07	0.36
3000	1.09	0.49
4000	1.11	0.55
5000	1.13	0.61
6000	1.15	0.68
7000	1.16	0.75
12000	1.20	0.96
15000	1.21	1.07
18000	1.22	1.17
26500	1.24	1.43
40000	1.26	1.74
45000	1.27	1.92
50000	1.29	2.09
67000	1.31	2.46

